

HP+™ Flash

Liquid Flashing Membrane

HP+ Flash is a one-component elastomeric material for use as a flexible waterproofing flashing membrane for rough openings. HP+ Flash offers easy application, even to damp surfaces, and durability in all climates.

PRODUCT HIGHLIGHTS

- + Adheres to wide variety of building materials
- + Single material to flash rough opening and window, saves time
- + Fast cure and tack-free time
- + Easy installation / No cutting or measuring
- + No special parts or tools
- + Guns and trowels easily
- + Thinner than flashing tapes
- + Broad application temperature range (above 25°F without primer)

PERFORMANCE

- + 30-60 lineal feet of coverage at 4" wide per propack
- + Solvent Free
- + 180 days UV exposure
- + Rain resistant immediately after application
- + Can be applied to damp substrates
- + Flexible and elastic
- + Vapor permeable

STORAGE

Store in original, unopened containers in a cool, dry place away from sources of heat and direct sunlight at a minimum of 40°F. In cold weather, keep containers at room temperature for at least 24 hours before using. Storage at elevated temperatures will reduce shelf life.

Shelf Life.


1 year when stored in cool, dry conditions away from sources of heat and sunlight.

PACKAGING

- + 20 oz. propack
- + 20 propacks per case

COLOR

- + Grey

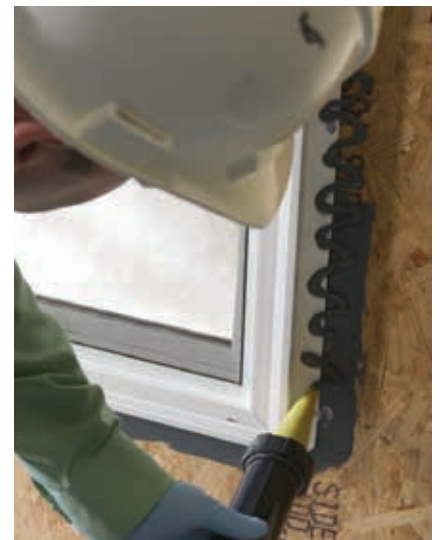


HP+™
Building Enclosure Systems
FROM BASF


 **BASF**
We create chemistry

HP+™ Flash Liquid Flashing Membrane


Typical rough opening treatment with HP+ Flash on masonry or concrete construction with flush buck

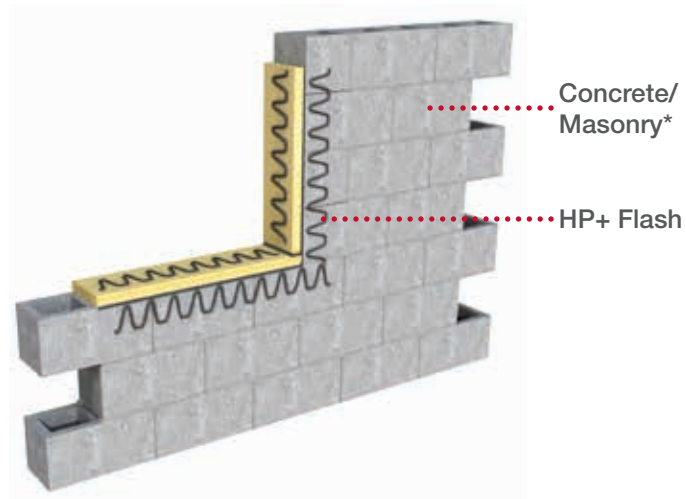

Typical rough opening treatment with HP+ Flash on framed construction

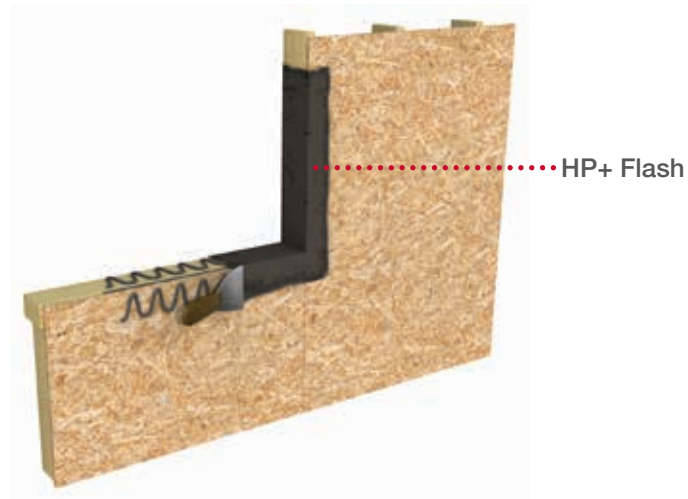

Typical pipe penetration

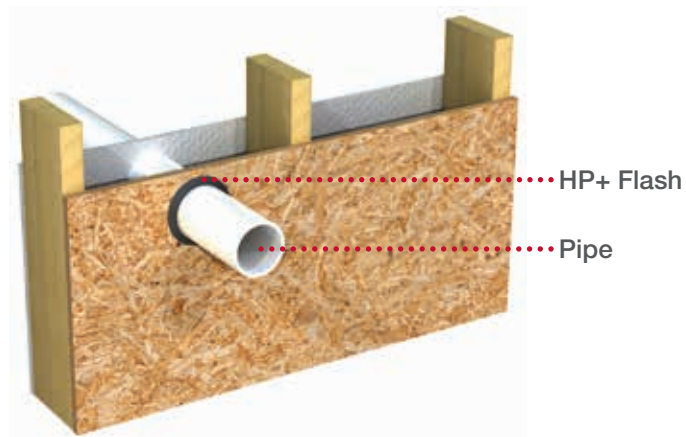

• Maximum 1/2" gap at penetrations.

- ✦ Ensure that HP+ Flash is uniformly applied at a 12-20 mil thickness.
- ✦ Extend HP+ Flash at least 12-20 mil thickness onto the exterior wall, maintaining 4" (100 mm) width.
- ✦ Allow HP+ Flash applied as sill/pan flashing, to skin before installing window.